


Technical Specifications

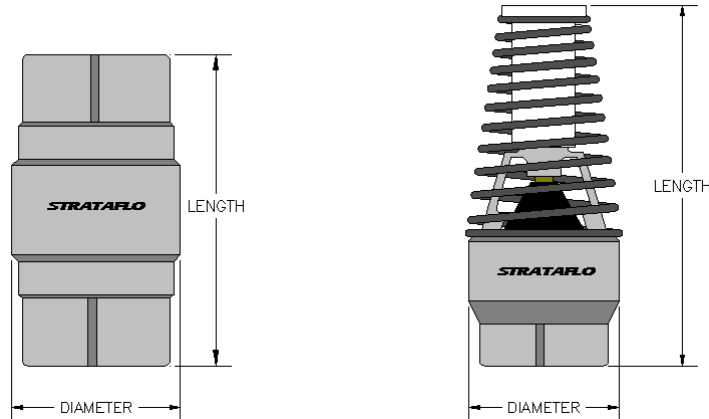

Check Valves				
Series	Pipe Size	Diameter	Length	Approx. Wt.
300	3/4"	1.62	3.31	0.90
300	1"	2.00	3.68	1.25
300	1 1/4"	2.41	4.57	2.00
300	1 1/2"	2.69	4.87	2.45
300	2"	3.34	5.56	3.90
300	2 1/2"	3.81	6.79	7.15
300	**3"	3.81	6.79	6.60
400	3/8"	1.16	2.63	0.50
400	1/2"	1.40	2.69	0.65
400	3/4"	1.62	3.31	0.90
400	1"	2.00	3.68	1.25
400	1 1/4"	2.41	4.57	2.00
400	1 1/2"	2.69	4.87	2.35
400	2"	3.34	5.56	3.80

Foot Valves				
Series	Pipe Size	Diameter	Length	Approx. Wt.
200	3/4"	1.31	3.63	0.40
200	1"	1.78	4.27	0.75
200	1 1/4"	2.28	4.74	1.15
200	1 1/2"	2.56	5.64	1.50
200	2"	3.25	5.39	2.90
200	2 1/2"	3.88	6.36	4.75
200	**3"	3.88	6.36	4.65
200A*	2"	1.89	4.00	0.75

* Valve is 1 1/4", however enters a 2" pipe

** 300 3" is male threaded on both ends.

All dimensions in inches. Approximate weight in pounds.

- No. 300 valves have a maximum working pressure of 200 lbs. Maximum temperature of 225°F. Approximate cracking pressure of 11b unless otherwise specified.
- No.400 valves have a maximum working pressure of 200 lbs. for oil, water and gas. Maximum steam pressure of 75psi. Maximum temperature of 300° F. Approximate cracking pressure of 11b unless otherwise specified.
- No. 200 valves have a maximum working pressure of 200 lbs. and a maximum temperature of 225° F.