




P.O. Box 8298
 Fort Wayne, IN 468398-8298
 Telephone (260) 482-4366
 Fax (260) 482-3340
 Email: sales@stratalflo.com Website: www.stratalflo.com

Pressure Loss and C_v Charts

Model No. 300, 375, 385, 2300

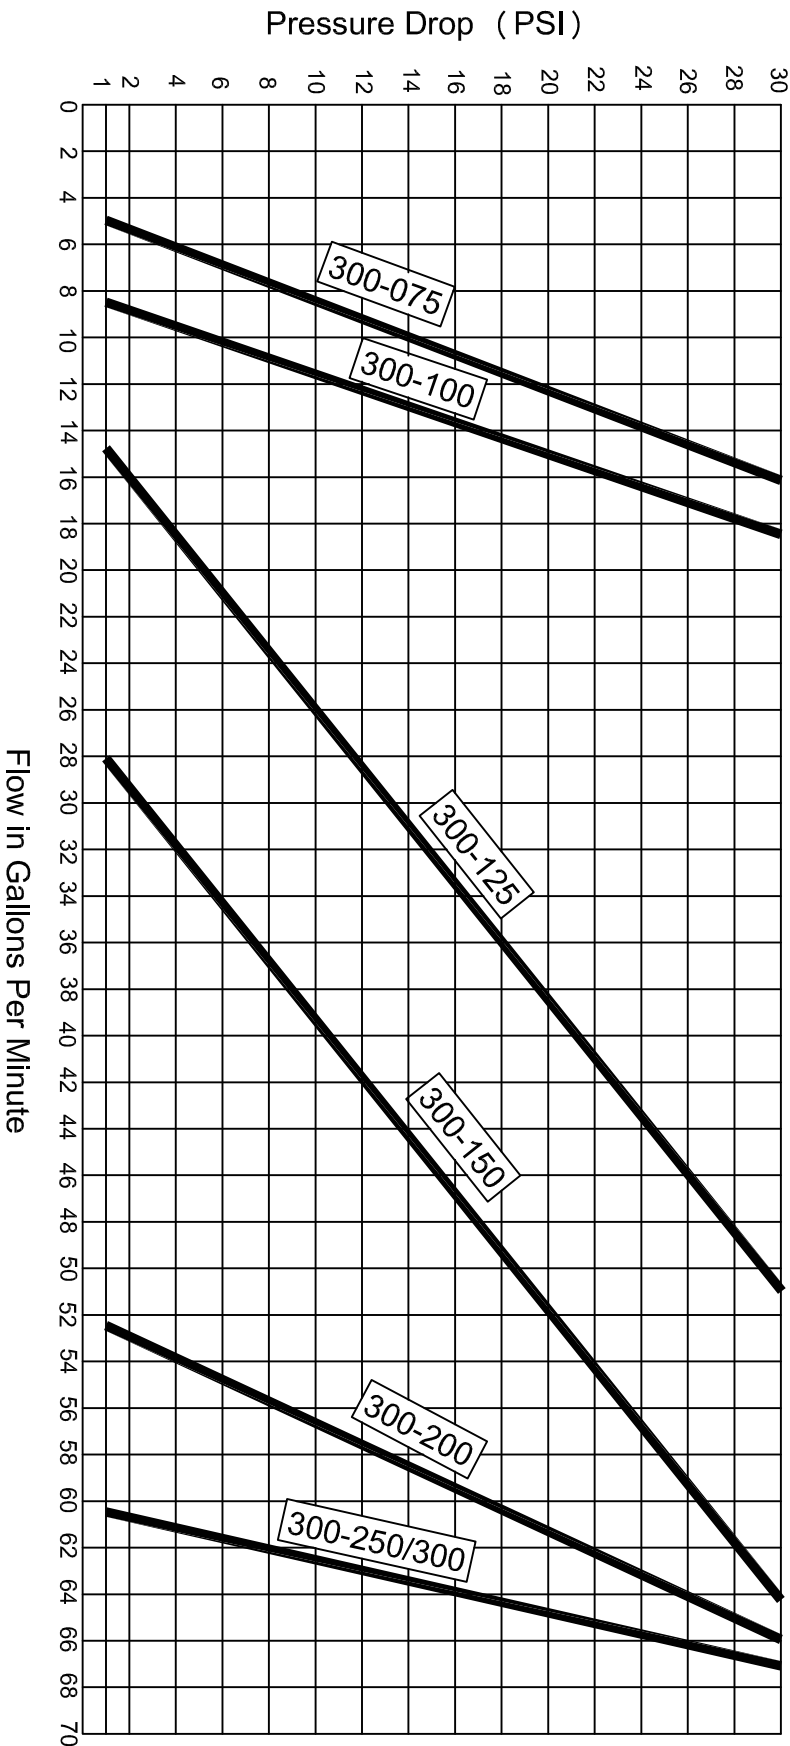

Stratalflo Products, Inc. reserves the right to change the design or specification of its products without notice and is not responsible for changes that may alter these values. The values identified in these charts were based on testing performed within a controlled and measured environment at Stratalflo Products. **C_v Factor** represents the amount of water that will pass through the valves with a one (1) psi pressure drop.

Model No.	Size	C _v Factor
300-075	3/4"	5.4
300-100	1"	8.2
300-125	1 1/4"	16.7
300-150	1 1/2"	32.2
300-200	2"	51.6
300-250/300	2 1/2" & 3"	60.5

Test Fluid: Water
 Test Temp: 68°F




P.O. Box 8298
Fort Wayne, IN 46898-8298

Telephone (260) 482-4366
Fax (260) 482-3340

Email: sales@strataflo.com Website: www.strataflo.com

Pressure Loss and C_v Charts

Model No. 400, 2400

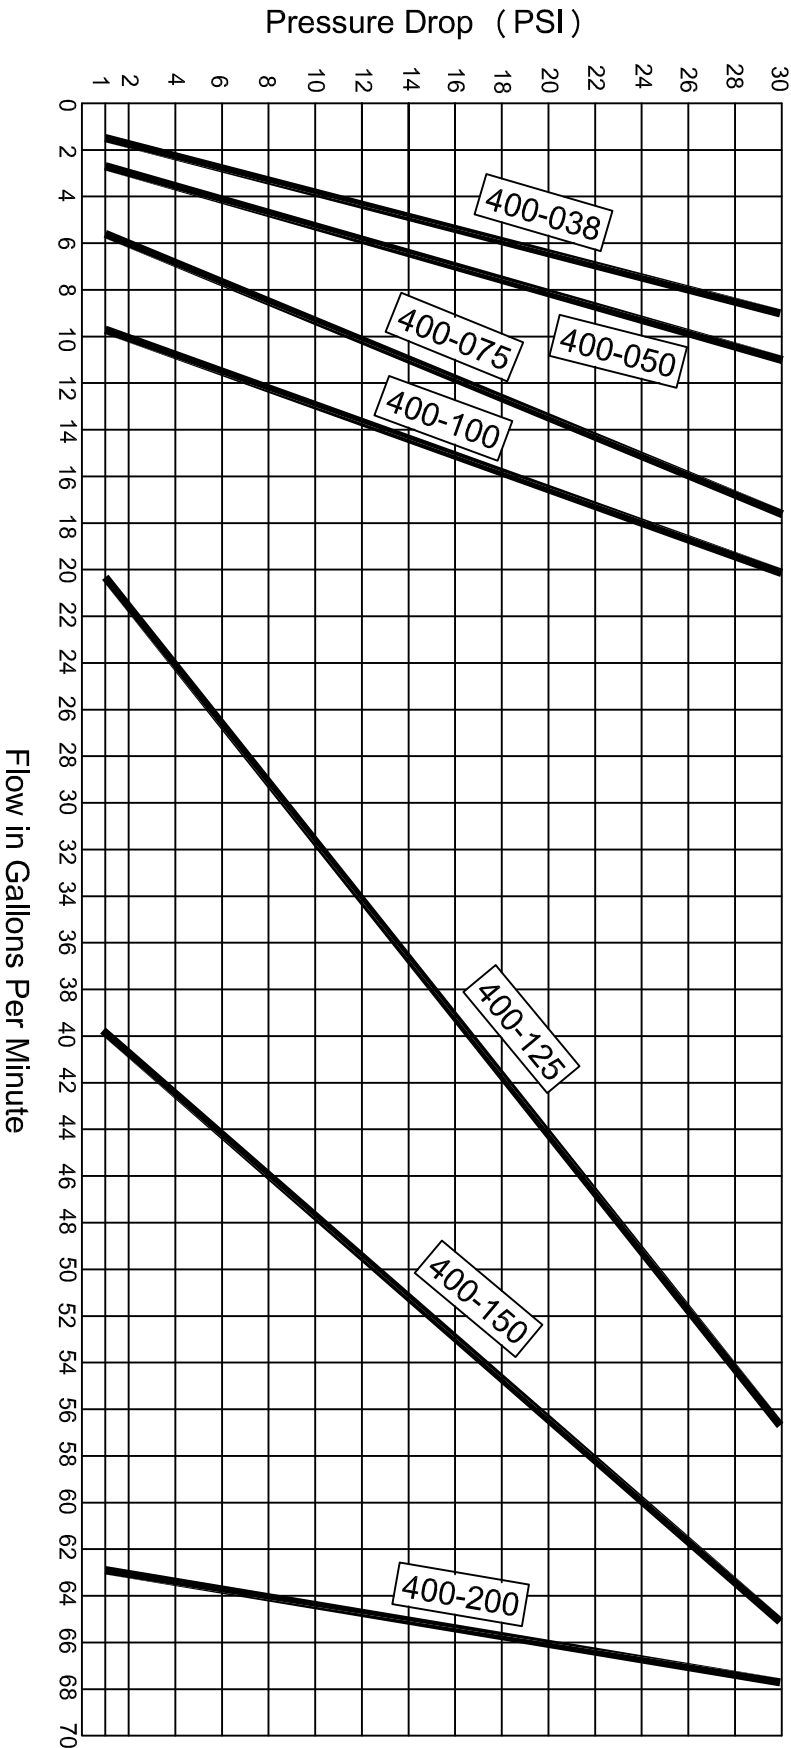

Strataflo Products, Inc. reserves the right to change the design or specification of its products without notice and is not responsible for changes that may alter these values. The values identified in these charts were based on testing performed within a controlled and measured environment at Strataflo Products. C_v Factor represents the amount of water that will pass through the valves with a one (1) psi pressure drop.

Test Fluid: Water
Test Temp: 68°F

Model No.	Size	C _v Factor
400-038	3/8"	1.8
400-050	1/2"	2.6
400-075	3/4"	5.9
400-100	1"	9.9
400-125	1 1/4"	20.1
400-150	1 1/2"	39.2
400-200	2"	63.8